



A886 6629 – simulation results

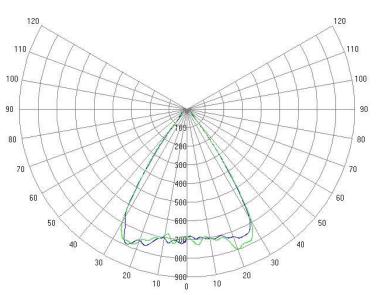

Polar Candela Distribution Plot

Projection wall 5x5 m at 1m



900 -180 -270 90 800 Luminous Intensity [cd] 600 500 400 300 200 100 -90 -80 -70 -60 -50 -40 -30 -20 -10 0 10 20 30 40 50 60 70 80 90 Angle Distribution [°]

Rectangular Candela Distribution Plot

LED used for simulation	CXA2530
Luminous Flux of LED [Im]	3600
Efficiency [%]*	90
FWHM C0 [°]	60
FWHM C90 [°]	60

*The ratio between luminous flux on the projection wall (5x5m at 1m) and luminous flux of LED