



A893 6624 – simulation results

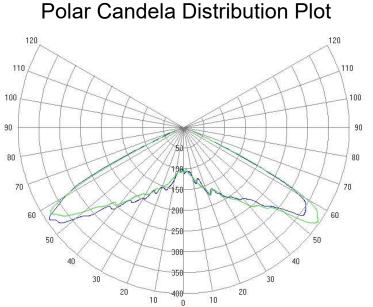

Projection wall 5x5 m at 1m



450 180 -270 400 350 Luminous Intensity [cd] 300 250 200 150 100 50 -80 -70 -60 -50 -40 -30 -20 -10 10 20 30 50 60 70 80 -90 0 40 90 Angle Distribution [°]

Rectangular Candela Distribution Plot

LED used for simulation	CXA2530
Luminous Flux of LED [lm]	3600
Efficiency [%]*	90
FWHM C0 [°]	120
FWHM C90 [°]	120

*The ratio between luminous flux on the projection wall (5x5m at 1m) and luminous flux of LED